

PA INSTALLATION SPEAKERS

CEILING SPEAKERS



	CS-451T	CS-662T	CS-663T	CS-5044T	CS-6066T	CS-3061T	CS-5061T	CS-6081T	CS-8151T
INPUT POWER / SPEAKER	4W RMS / 127 mm (5")	6W RMS / 152.4 mm (6")	6W RMS / 152.4 mm (6")	4W RMS / 127 mm (5")	6W RMS / 152.4 mm (6")	6W RMS / 76.2 mm (3")	6W RMS / 127 mm (5")	8W RMS / 152.4 mm (6")	15W RMS / 203.2mm (8")
POWER TAPS	4/2/1W on 100V	6/3/1.5W on 100V	6/3/1.5W on 100V	4/2/1W on 100V	6/3/1.5W on 100V	6/3/1.5W on 100V	6/3/1.5W on 100V	8/4/2W on 100V	15/10/5W on 100V
FREQUENCY RESPONSE	80-15,000Hz	60-15,000Hz	60-15,000Hz	80-15,000Hz	60-15,000Hz	65-15,000Hz	60-15,000Hz	60-15,000Hz	55-16,000Hz
SPL at 1kHz (1W/1m)	92dB	92dB	92dB	92dB	92dB	88dB	92dB	92dB	93dB
HOLE CUT OUT	Ø148 mm	Ø185 mm	Ø185 mm	Ø148 mm	Ø181 mm	Ø93 mm	Ø168 mm	Ø197 mm	Ø240 mm
DIMENSIONS	Ø160 × H68 mm	Ø230 × H75 mm	Ø209 × H79 mm	Ø157 × H75 mm	Ø195 × H77 mm	Ø105 × H85 mm	Ø200 × H85 mm	Ø227 × H77 mm	Ø270 × H98 mm
MATERIAL	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS

2
WAY



	CSD-5201T	CSD-6303T	CSD-8401T
INPUT POWER / SPEAKER	20W RMS / 127 mm (5")	30W RMS / 152.4 mm (6")	40W RMS / 203.2 mm (8")
POWER TAPS	20/10/5W on 100V	30/15/7.5W on 100V	40/20/10W on 100V
FREQUENCY RESPONSE	90-18,000Hz	90-18,000Hz	90-18,000Hz
SPL at 1kHz (1W/1m)	91dB	92dB	93dB
HOLE CUT OUT	Ø168 mm	Ø202 mm	Ø242 mm
DIMENSIONS	Ø200 × H85 mm	Ø230 × H120 mm	Ø272 × H120 mm
MATERIAL	ABS	ABS	ABS

	CSX-3081T	CSX-5081T	CSX-6101T	BS-6083T
INPUT POWER	8W RMS / 76.2 mm (3")	8W RMS / 127 mm (5")	10W RMS / 152.4 mm (6")	8W RMS / 152.4 mm (6")
POWER TAPS	8/4/2W on 100V	8/4/2W on 100V	10/5/2.5W on 100V	8/4/2W on 100V
FREQUENCY RESPONSE	65-15,000Hz	80-15,000Hz	60-15,000Hz	60-15,000Hz
SPL at 1kHz (1W/1m)	88dB	92dB	92dB	92dB
HOLE CUT OUT	Ø93 mm	Ø143 mm	Ø181 mm	—
DIMENSIONS	Ø113 × H86 mm	Ø168 × H68 mm	Ø204 × H79 mm	W230 × H250 × D75 mm
MATERIAL	ABS	Metal	Metal	Metal

WALL SPEAKERS

2
WAY



	PS-500TM	PS-400TM	PS-300TM
INPUT POWER	32W RMS	16W RMS	10W RMS
POWER TAPS	32/16/8W on 100V	16/8/4W on 100V	6/3/1.5W on 100V
IMPEDANCE	8Ω	8Ω	8Ω
FREQUENCY RESPONSE	80-20,000Hz	85-20,000Hz	150-20,000Hz
SPL at 1kHz (1W/1m)	87dB	86dB	86dB
DIMENSIONS	W162 × H256 × D165 mm	W133 × H209 × D130 mm	W105 × H161 × D119 mm
MATERIAL	ABS	ABS	ABS

2
WAY



	ASX-912B/912W	ASX-612B/612W	ASX-312B/312W
INPUT POWER	90W RMS	60W RMS	30W RMS
POWER TAPS	90W	60W	30W
IMPEDANCE	8Ω	8Ω	8Ω
FREQUENCY RESPONSE	55-20,000Hz	50-20,000Hz	75-20,000Hz
SPL at 1kHz (1W/1m)	90dB	87dB	87dB
DIMENSIONS	W270 × H378 × D200 mm	W215 × H310 × D175 mm	W180 × H248 × D140 mm
MATERIAL	ABS	ABS	ABS

2
WAY



	ASX-912BT/912WT	ASX-612BT/612WT	ASX-312BT/312WT	IMPRESS 75T	IMPRESS 100T	OSX-666T	OSX-999T
INPUT POWER	90W RMS	60W RMS	30W RMS	75W RMS 8Ω / 30W RMS 100V	100W RMS 8Ω / 60W RMS 100V	60W RMS 8Ω / 30W RMS 100V	90W RMS 8Ω / 60W RMS 100V
POWER TAPS	90/60/30/15W	60/40/30/20/10W	30/20/15/10/5W	30/15/7.5W	60/30/15W	30/15/7.5W	60/30/15W
IMPEDANCE/VOLTAGE	100V	100V	100V	8Ω /100V	8Ω /100V	8Ω /100V	8Ω /100V
FREQUENCY RESPONSE	55-20,000Hz	50-20,000Hz	75-20,000Hz	60-20,000Hz	50-20,000Hz	95-20,000Hz	80-20,000Hz
SPL at 1kHz (1W/1m)	90dB	87dB	87dB	90dB	90dB	87dB	87dB
DIMENSIONS	W270 × H378 × D200 mm	W215 × H310 × D175 mm	W180 × H248 × D140 mm	W180 × H255 × D163 mm	W250 × H390 × D236 mm	W205 × H330 × D199 mm	W251 × H398 × D232 mm
MATERIAL	ABS	ABS	ABS	ABS	ABS	ABS	ABS



	WS-6255TM	BS-6082T	WSX-681T/WSX-684T*	WS-661TM/WS-664TM*	WSX-551T
INPUT POWER	25W RMS	8W RMS	8W RMS	6W RMS	5W RMS
POWER TAPS	25/15/10/5W on 100V	8/4/2W on 100V	8/4/2W on 100V	6/3/1.5W on 100V	5/2.5/1.25W on 100V
FREQUENCY RESPONSE	120-15,000Hz	60-15,000Hz	60-15,000Hz	60-15,000Hz	80-15,000Hz
SPL at 1kHz (1W/1m)	94dB	92dB	92dB	92dB	92dB
DIMENSIONS	W258 × H258 × D128 mm	W230 × H230 × D75 mm	W230 × H250 × D115 mm	W258 × H258 × D128 mm	W179 × H195 × D101 mm
MATERIAL	ABS	Metal	ABS	ABS	ABS

* with Volume Control

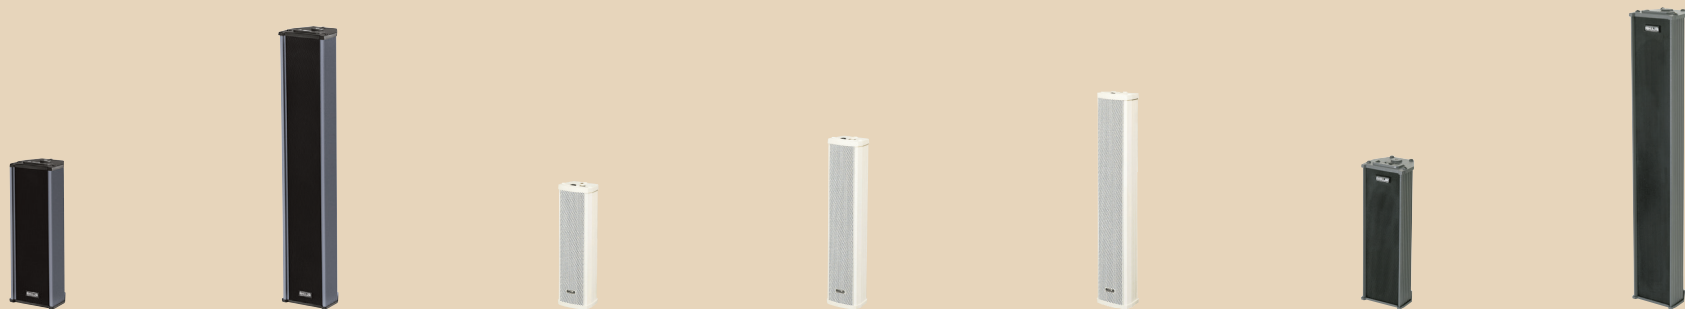
* with Volume Control

SPEAKER VOLUME CONTROL




	AT-40/AT-20/AT-06
RATED POWER	40W/20W/6W
INPUT VOLTAGE	100V
OUTPUT POSITION	11 selectable positions in AT-40 & AT-20; 5 selectable positions in AT-06
DIMENSIONS	W87 × H87 × D78 mm
MATERIAL	ABS

COLUMN SPEAKERS



	SCM-15 / 15T	SCM-30 / 30T	ASC-310T	ASC-315T	ASC-320T	ASC-20T	ASC-40T
INPUT POWER	10W RMS	20W RMS	10W RMS	15W RMS	20W RMS	15W RMS	30W RMS
POWER TAPS	10 WATTS / 10/7.5/5W	20 WATTS / 20/15/10W	10/7.5/5/2.5W	15/10/5/2.5W	20/15/10/5W	15/10/5/2.5W	30/20/10/5W
IMPEDANCE/VOLTAGE	8Ω / 100V	16Ω / 100V	100V	100V	100V	100V	100V
FREQUENCY RESPONSE	150-10,000Hz	150-10,000Hz	150-15,000Hz	150-15,000Hz	150-15,000Hz	150-10,000Hz	150-10,000Hz
SPL at 1kHz (1W/1m)	92dB	95dB	90dB	91.5dB	93dB	92dB	95dB
DIMENSIONS	W165 × H455 × D145 mm	W165 × H885 × D145 mm	W115 × H389 × D89 mm	W115 × H524 × D89 mm	W115 × H658 × D89 mm	W145 × H460 × D130 mm	W145 × H900 × D130 mm
MATERIAL	Metal	Metal	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium

HORN SPEAKERS

IP66 EN 60529							
	UHC-30	UHC-25	UHC-15	SUH-40	SUH-25M	SUH-15M	EHC-10/10XT
INPUT POWER	30W RMS/45W Max.	25W RMS/38W Max.	15W RMS/23W Max.	40W RMS/60W Max.	25W RMS/38W Max.	15W RMS/23W Max.	10W RMS/15W Max.
IMPEDANCE / POWER TAPS	8Ω	8Ω	8Ω	16Ω	8Ω	8Ω	8Ω / 10/7.5/2.5/1.25W
FREQUENCY RESPONSE	240-10,000Hz	250-10,000Hz	275-7,000Hz	180-7,000Hz	250-10,000Hz	275-7,000Hz	350-7,000Hz
SPL at 1kHz (1W/1m)	108dB	108dB	106dB	112.5dB	108dB	106dB	102dB
DIMENSIONS	Ø313 (L285) mm	Ø274 (L280) mm	Ø205 (L245) mm	400 × 200 (L385) mm	315 × 165 (L290) mm	253 × 152 (L265) mm	180 × 130 (L195) / (L215) mm
MATERIAL	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)


IP66 EN 60529							
	UHC-30XT	UHC-25XT	UHC-15XT	SUH-40XT	SUH-25MT	SUH-15MT	AMH-402T
INPUT POWER	30W RMS/45W Max.	25W RMS/38W Max.	15W RMS/23W Max.	40W RMS/60W Max.	25W RMS/38W Max.	15W RMS/23W Max.	40W RMS
POWER TAPS	30/25/20/15/10/5W	25/20/15/10/5W	15/10/5/2.5W	40/30/20/10/5W	25/20/15/10/5W	15/10/5/2.5W	40/20/10/5W
FREQUENCY RESPONSE	240-10,000Hz	250-10,000Hz	275-7,000Hz	180-7,000Hz	250-10,000Hz	275-7,000Hz	120-16,000Hz
SPL at 1kHz (1W/1m)	108dB	108dB	106dB	112.5dB	108dB	106dB	98dB
DIMENSIONS	Ø313 (L315) mm	Ø274 (L310) mm	Ø205 (L270) mm	400 × 200 (L422) mm	315 × 165 (L320) mm	253 × 152 (L293) mm	W370 × H255 × D300 mm
MATERIAL	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)

DRIVER UNITS / HORN / REFLEX HORNS

IP66 EN 60529							
	AU-40®	AU-60®	AU-40®XT	AU-50®XT	AHC-15	WFB/WFA	ATH-22
INPUT POWER	40W RMS/60W Max.	60W RMS/90W Max.	40W RMS/60W Max.	50W RMS/70W Max.	15W RMS	BELL DIA	457.2 mm (18") / 588.8 (22")
IMPEDANCE/POWER TAPS	16Ω	16Ω	40/30/20/10/5W	50/40/20/10/5W	8Ω		533.4 mm (21") —
FREQUENCY RESPONSE	160-7,000Hz	160-7,000Hz	160-7,000Hz	160-7,000Hz	300-7,000Hz	CUT-OFF FREQ.	190Hz/160Hz 160Hz
SPL at 1kHz (1W/1m)	112.5dB	113.5dB	113.5dB	113dB	106dB	MATERIAL	Aluminium Aluminium
DIMENSIONS	Ø116 × H98 mm	Ø126 × H100 mm	Ø150 × H137 mm	Ø150 × H143 mm	W170 × H155 (L157) mm		
MATERIAL	Die-cast Aluminium, Nylon	Die-cast Aluminium, Nylon	Die-cast Aluminium, Nylon	Die-cast Aluminium, Nylon	ABS (UV Protected)		

SPECIAL PURPOSE SPEAKERS

PA Sound Projector		PA Dual Sound Projector		Garden Speaker	Landscape Speaker	Stage Monitor Speaker	Line Array Speakers					
IP65 EN 60529		IP44 EN 60529		IP66 EN 60529		IP66 EN 60529		IP66 EN 60529				
	SP-5251T		SP-6305TD		GSX-630T		LSX-930T		SMS-450	ALX-7500	ALX-9000	ALX-15000M
INPUT POWER	25W RMS	30W RMS	30W RMS		30W RMS		400W RMS		600W RMS (Each Module)	800W RMS (Each Module)	1200W RMS (Each Module)	
IMPEDANCE/POWER TAPS	25/20/15/10/5W on 100V	30/20/10/5W on 100V	30/15/7.5W on 100V		8Ω / 30/15/7.5W on 100V		8Ω		8Ω	4Ω	8Ω	
FREQUENCY RESPONSE	120-15,000Hz	120-15,000Hz	80-20,000Hz	80-20,000Hz	45-18,000Hz	52-20,000Hz	48-20,000Hz	58-20,000Hz				
SPL at 1kHz (1W/1m)	93dB	94dB	90dB	90dB	98dB	98dB	99dB	97dB				
DIMENSIONS	Ø183 × H215 mm	Ø175 × H256 mm	Ø325 × H335 mm	Ø325 × H335 mm	W700 × H400 × D525 mm	W695 × H360 × D530 mm	W1060 × H374 × D460 mm	W1050 × H360 × D530 mm				
MATERIAL	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	ABS (UV Protected)	MDF	Birch Plywood	Birch Plywood	Birch Plywood				

Bi-AMP Active Speakers				Active Subwoofer		MOULDED CABINET SPEAKER SYSTEMS		
								
ALIVE 512		ALIVE 515		XPA-1520DP		SUB-300A		
POWER OUTPUT	450W (LF); 50W (HF)	450W (LF); 50W (HF)	125W (LF); 50W (HF)	300W	INPUT POWER / SPEAKER	400W RMS / 381mm (15")	300W RMS / 304.8mm (12")	200W RMS / 254mm (10")
INPUTS	Mic / Line / RCA	Mic / Line / RCA	Mic / Line / Aux	2 × Combo (TRS / XLR)	FREQUENCY RESPONSE	45-18,000Hz	60-18,000Hz	65-18,000Hz
SPEAKER	304.8mm (12") Speaker	381mm (15") Speaker	254mm (10") Speaker	304.8mm (12") Speaker	NOMINAL IMPEDANCE	8Ω	8Ω	8Ω
FREQUENCY RESPONSE	50-20,000Hz	50-20,000Hz	50-20,000Hz	47-125Hz	SPL at 1kHz (1W/1m)	98dB	97dB	94dB
DIMENSIONS	W365 × H615 × D350 mm	W425 × H730 × D410 mm	W325 × H485 × D255 mm	W530 × H370 × D480 mm	DIMENSIONS	W460 × H690 × D370 mm	W385 × H585 × D305 mm	W325 × H485 × D255 mm
MATERIAL	Polypropylene	Polypropylene	Polypropylene	MDF	MATERIAL	Polypropylene	Polypropylene	Polypropylene



Design and Specifications are subject to change without notice owing to continuous product up-gradation. Technical specifications are subject to production tolerances. We cannot be held responsible for printing errors, should they occur. AHUJA is a registered trademark of Ahuja Radios in India and other countries. © Copyright Ahuja Radios, 2026. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements are strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

AHUJA RADIOS

215, Okhla Industrial Estate, New Delhi-110 020, India
Tel: +91-11-26831549/41612474 | Fax: +91-11-26847287/41616563
E-mail: marketing@ahujaradios.com

For Enquiries (within India): marketing@ahujaradios.com
For International Enquiries (from outside India): intl.trade@ahujaradios.com

AHUJA RADIOS, C-45, Phase-II, Noida-201305 (UP),
TRUSOUND PVT. LTD., C-89, Sector IV, Noida-201301 (UP)

www.ahujaradios.com



8329575191



An ISO 14001:2015 Company
An ISO/IEC 27001:2013 Company



An ISO 9001:2015 Company

For further details, please contact: