


AMX-1412

14 Channel

DESCRIPTION :

The Ahuja AMX-1412 is a 14-channel PA analog mixer. Echo section provided with Delay, Repeat and Level controls.

Tape section for Record and Playback facility. Each channel has GAIN, BASS, MID, TREBLE, ECHO, PAN and slide LEVEL controls with CLIP LED indicator.

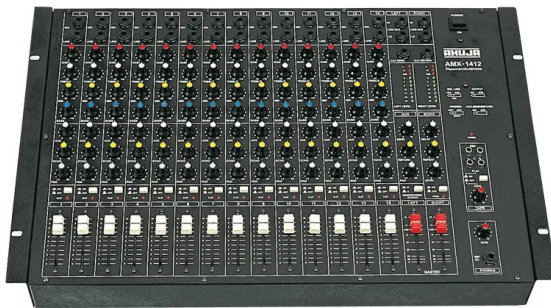

FEATURES :

- Input Channels : Each Channel has separate 1/4" balanced phone jack for Mic and Line & accepts both balanced & unbalanced signals.
- AUX Control : This controls the level of the channel in the final mix to Aux Send output.
- AUX Send & AUX Return : These have been provided for sending the pre-fader output of channels for monitoring or for adding a Special Effects Unit.
- MONO/STEREO Output : Mono output is available from either Left & Right output jacks when the switch is in 'Mono' position.
- Each channel has GAIN, BASS, MID, TREBLE, ECHO, PAN and slide LEVEL controls with CLIP LED indicator.
- Echo section provided with Delay, Repeat & Level controls. Tape section for Record & Playback facility.

SPECIFICATIONS :

Power Requirements	AC: 220-240V 50/60Hz, DC: 24v (2×12V Car Battery)
MIC INPUT (Impedance/Gain)	2kOhm/62dB
LINE INPUT (Impedance/Gain)	20kOhm Balanced/42dB, 10kOhm Unbalanced/42dB
Distortion	< 0.08%
Frequency Response	30Hz - 20kHz (+0, -1dB)
Tone Controls	Bass : ±12dB at 100Hz, Mid : ±12dB at 2kHz, Treble : ± 12dB at 10kHz
Line Output LO	-10dBm/+2dBm (200mV/1V)
Line Output HI	0dBm/+17dBm (775mV/5.5V)
ECHO/Reverb System	Digital Signal Processing
Signal to Noise Ratio	>70dB (0dBm, 0.775V)
Dimensions	W633 × H93 × D420 mm
Weight	9.4kg